


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/14/14	
A		UPDATE SPEC.	7/2/20	AY/RT

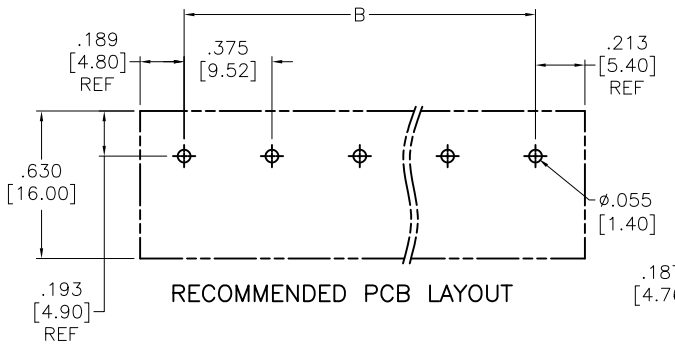

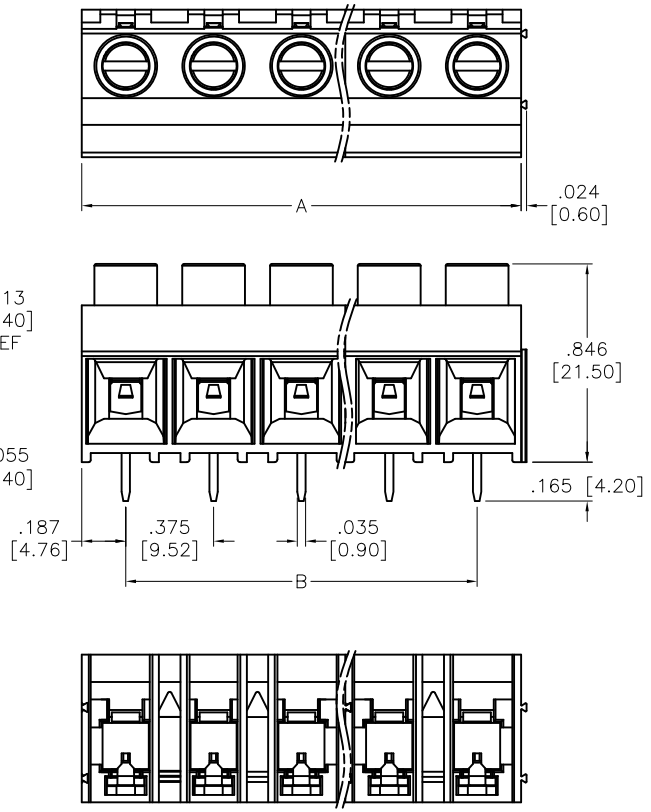

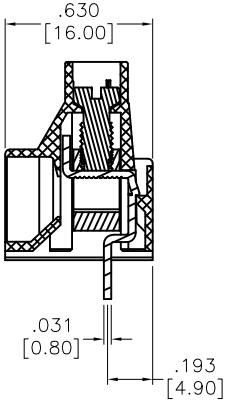

SPECIFICATIONS:

Material:
Insulator: Thermoplastic, rated UL 94V–0
Insulator color: Green
Clamp: Brass, Nickel plated
Screw: M3.5, Steel, Zn plated.
Contact: Copper Alloy, Tin plated.
Electrical:
Voltage rating: 300 VAC
Current rating: 30 A
Mechanical:
Wire strip length: 7–8mm
Torque (Lb–In): 5.5
Solid wire: 10–24 AWG
Stranded: 10–24 AWG
Withstanding Voltage: 1.6KV
Temperature Rating:
Operating temperature: –40°C to +115°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Positions: 02 thru 16
A = .375 [9.52] X No. of Positions
B = .375 [9.52] x No. of Spaces

	Tolerance
2–6P	±.006 [0.15]
7–12P	±.010 [0.25]
13–16P	±.014 [0.35]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	8/14/14
CHECKED	LL	8/14/14
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
TERMINAL BLOCK, PCB, VERTICAL, 9.52MM PITCH
SINGLE ROW PIN

SIZE	PART NO.	REV.
X	EB4-XX-N-SR	A

REF:	SCALE:	SHEET
S00007T	NTS	1 OF 1