

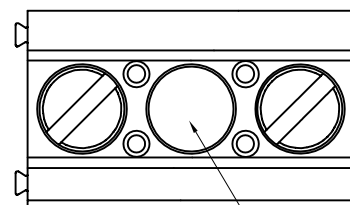
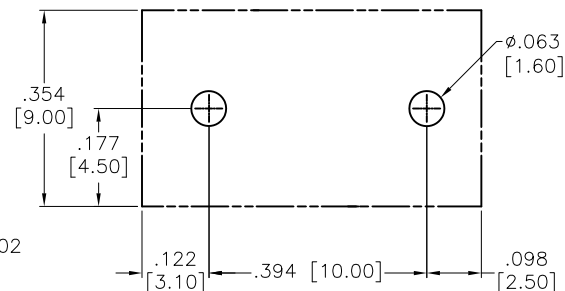


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/27/15	

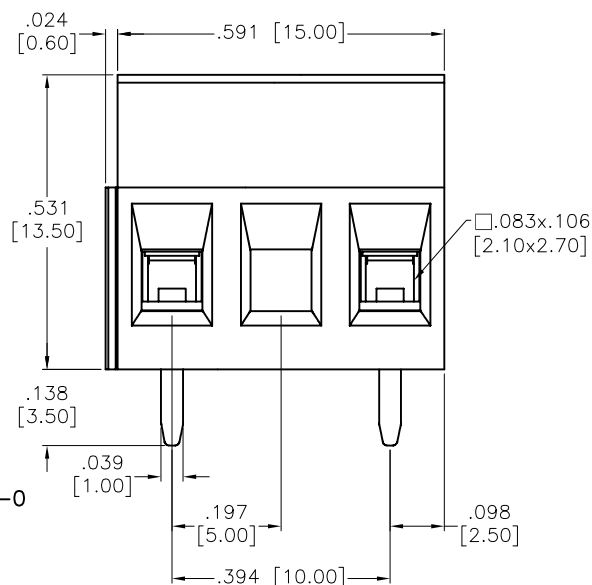

Removed Pin #02

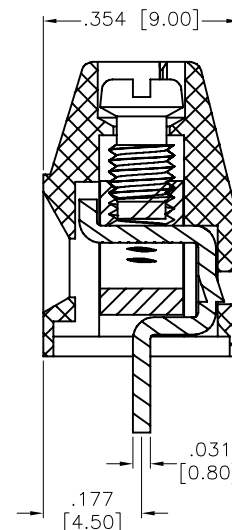

SPECIFICATIONS:

Material:
 Insulator: Thermoplastic, rated UL 94V-0
 Insulator color: Green
 Clamp: Brass, Nickel plated
 Contact: Brass, Tin plated
 Screw: Steel, M3/Zn plated
 Electrical:
 Operation voltage: 300 VAC
 Current rating: 16 Amps
 Withstanding Voltage: 1.6KV
 Mechanical :
 Wire range(mm²): 0.5~1.5
 Solid wire(AWG): 12-28
 Stranded wire(AWG): 12-28
 Torque(Lb-In): 3.5
 Wire strip length(mm): 6-7
 Temperature Rating:
 Operating temperature: -40°C to +115°C
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010			ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS DRAWN AY CHECKED MW APPROVED		DATE 11/27/15 11/27/15		TITLE EURO BLOCK, .197 [5.00] PITCH, 3P GREEN, REMOVED PIN 02
SIZE X		PART NO. EBAF-03-C-X02		REV. -
REF: S00007T		SCALE: NTS		SHEET 1 OF 1