

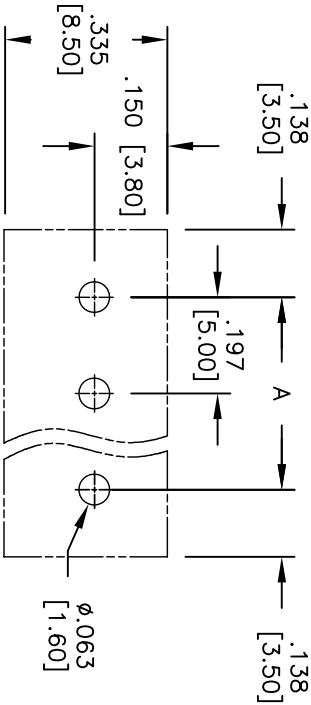


| Rev | AWO # | Description | Date    | Appr |
|-----|-------|-------------|---------|------|
| -   |       | RELEASED    | 5/22/12 |      |

APPROVED: \_\_\_\_\_  
DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_



Recommended PCB Layout

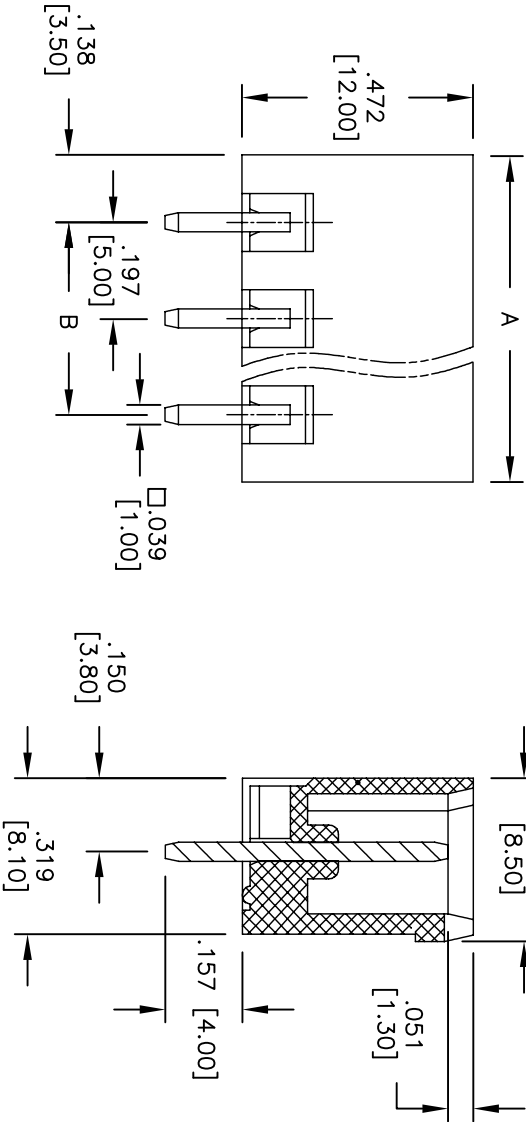

|        | Tolerance    |
|--------|--------------|
| 2-6P   | ±.006 [0.15] |
| 7-12P  | ±.008 [0.20] |
| 13-18P | ±.012 [0.30] |
| 19-24P | ±.016 [0.40] |

Positions: 02 thru 24  
A = .197 [5.00] x No. of Positions+ .079 [2.00]  
B = .197 [5.00] x No. of Spaces

SPECIFICATIONS:

Material:  
Insulator: Thermoplastic, rated UL 94V-0  
Insulator color: Black  
Contact: Brass, Tin plated.  
Electrical:  
Operation voltage: 300 VAC  
Current rating: 20 Amps  
Withstanding Voltage: 1.6KV  
Environmental:  
Operating temperature: -40°C to +115°C  
Lead free, RoHS compliant.



**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
Phone: 908-687-5000 Fax: 908-687-5710

TITLE  
TERMINAL BLOCK, SOCKETS FOR PLUGGABLE,  
VERTICAL, .197 [5.00] PITCH

| UNLESS OTHERWISE SPECIFIED<br>ALL DIMENSIONS ARE MM [INCHES]<br>TOLERANCES: EXCEPT AS NOTED |       |      |         | Holes         |       |      |         |
|---------------------------------------------------------------------------------------------|-------|------|---------|---------------|-------|------|---------|
| INCHES                                                                                      |       |      |         | Holes         |       |      |         |
| .X                                                                                          | ±.10  | ØX   | ±.10    | .X            | ±.10  | ØX   | ±.10    |
| .XX                                                                                         | ±.020 | ØXX  | ±.015   | .XX           | ±.020 | ØXX  | ±.015   |
| .XXX                                                                                        | ±.015 | ØXXX | ±.010   | .XXX          | ±.015 | ØXXX | ±.010   |
| APPROVALS                                                                                   |       |      |         | DATE          |       |      |         |
| DRAWN                                                                                       | AY    |      | 5/22/12 | CHECKED       | LW    |      | 5/22/12 |
| APPROVED                                                                                    |       |      |         |               |       |      |         |
| SIZE                                                                                        |       |      |         | PART NO.      |       |      |         |
| X                                                                                           |       |      |         | EBP-XX-C-C-BK |       |      |         |
| REF:                                                                                        |       |      |         | SCALE: NTS    |       |      |         |
| S00007T                                                                                     |       |      |         | SHEET 1 OF 1  |       |      |         |