

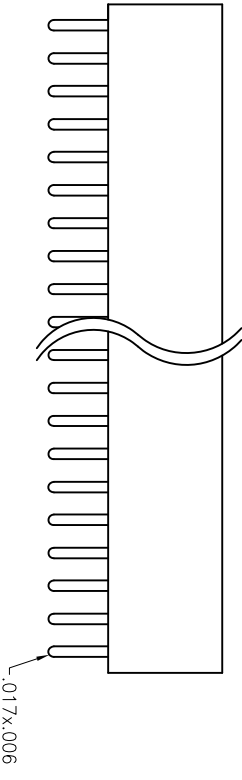
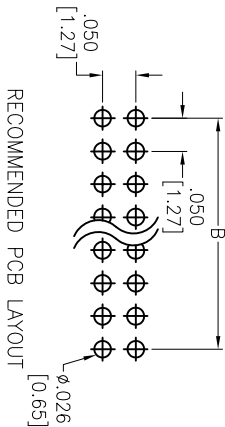


Rev	AWO #	Description	Date	Appr
-		RELEASED	06/17/13	

APPROVED: _____
DATE: _____ TITLE: _____

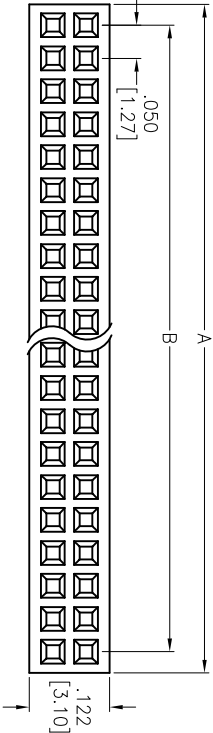

SPECIFICATIONS:

Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Plating: Gold
Flash over Nickel underplate overall
Electrical: Current rating: 1 Amp max.
Contact resistance: 20 mohms max. initial
Insulation resistance: 1,000 Mohms min.
Dielectric withstanding voltage: 300 VAC for 1 minute
Temperature Rating: Operating temperature: -40°C to +105°C
Environmental: Lead free, RoHS compliant

Positions: .04 thru 100
A = .050 [1.27] x No. of Positions Per Row + .014 [0.35]
B = .050 [1.27] x No. of Spoces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
INCHES				Holes			
.X	± .10	ØX	± .10	TITLE .050 [1.27] FEMALE HEADER, DIP TYPE GOLD PLATED, NO KEY			
.XX	± .020	ØXX	± .015				
.XXX	± .015	ØXXX	± .010				
APPROVALS				DATE			
DRAWN	TW		06/17/13	SIZE X			
CHECKED	KW		06/17/13				
APPROVED							
REF: S00032T				SCALE: NTS			
				SHEET 1 OF 1			

