

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/13/12	
A		UPDATE DRAWING	6/12/15	AY/GC


APPROVED: _____


DATE: _____ TITLE: _____

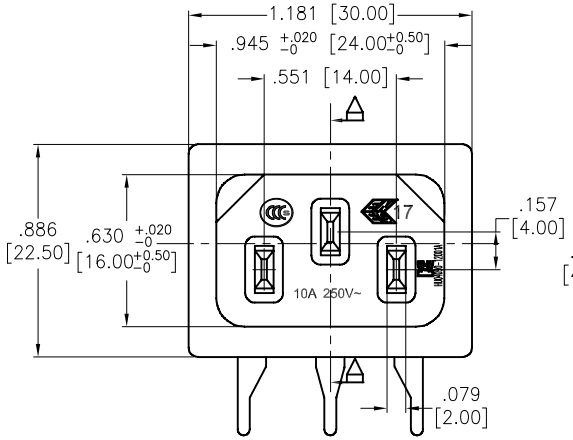

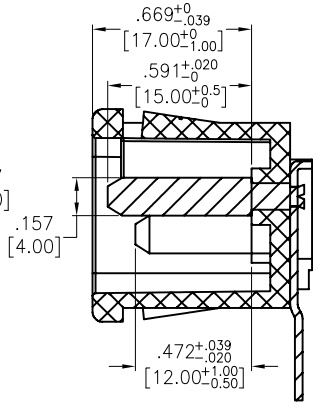


SECTION A-A

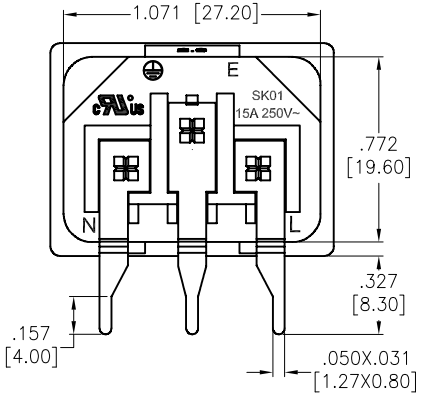






RECOMMENDED PCB LAYOUT

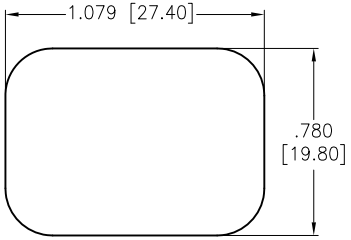

RECOMMENDED PANEL CUT

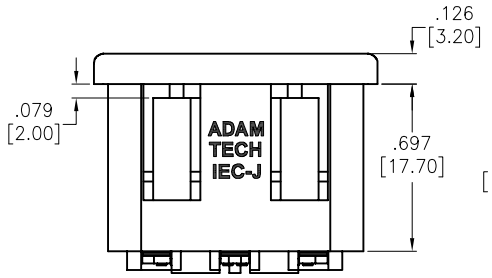

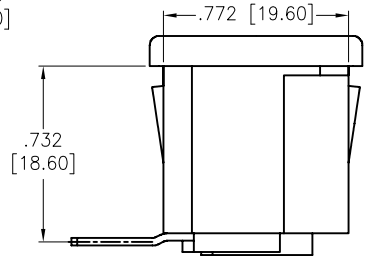

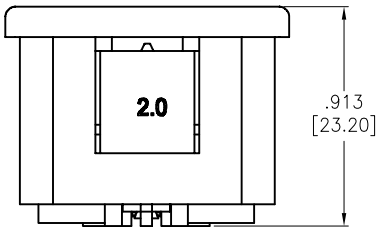

SPECIFICATIONS:
Material:
Insulator: Nylon66, rated UL 94V-0
Insulator color: Black
Contacts: Copper alloy
Pin: Copper alloy, Nickel plated
Plating:
Tin over Copper underplate
Electrical:
Current rating: 15A @250V (C-ULus)
10A @250V (ENEC & CCC & KC)
Insulation resistance: 100 Mohms min @ 500 VDC
Dielectric withstanding voltage: 3,000 VAC for 1 minute
Temperature Rating:
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	TW	12/13/12
CHECKED	CC	12/13/12
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: IEC MALE INLET, SNAP-IN PANEL MOUNT RIGHT ANGLE, PCB TAILS

SIZE	PART NO.	REV.
X	IEC-J-4-200-8.30-NST	A

REF: S00087C | SCALE: NTS | SHEET 1 OF 1