

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/23/22	


APPROVED: _____


DATE: _____ TITLE: _____

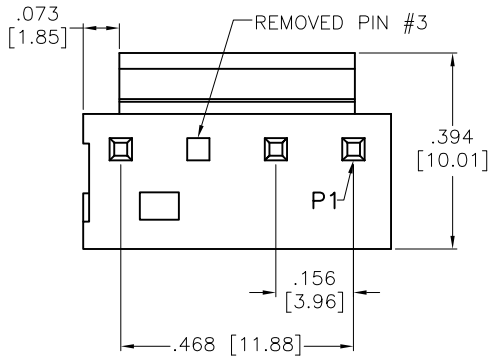

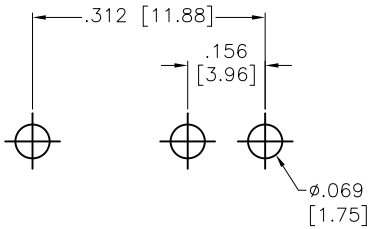

RECOMMENDED P.C.B LAYOUT

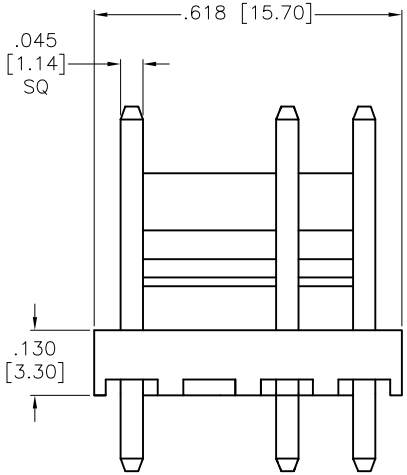

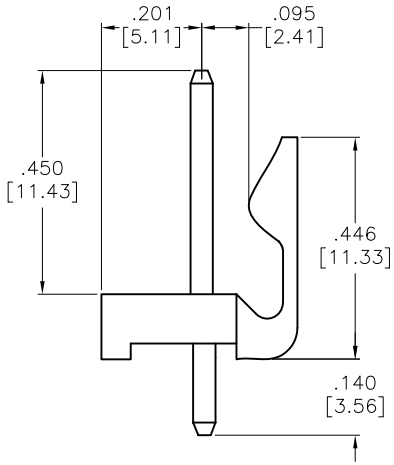

SPECIFICATIONS:
Material:
Insulator: PA46, glass reinforced, rated UL 94V–0
Insulator color: Natural
contact: Brass, Matte Tin over Nickel Plated
Electrical:
Current rating: 5 Amps
Contact resistance: 20mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,500 VAC/DC for 1 minute
Temperature Rating:
Operating temperature: –25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	9/23/22
CHECKED	SS	9/23/22
APPROVED		

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.156 [3.96] HEADER, VERTICAL, 4P
REMOVED PIN # 3, MATTE TIN PLATED

SIZE	PART NO.	REV.
X	LHDA-04-MTS-NY46-X03	-

REF: S00019C | SCALE: NTS | SHEET 1 OF 1