
APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/18/11	
A		UPDATE SPEC.	9/11/19	AY/BC

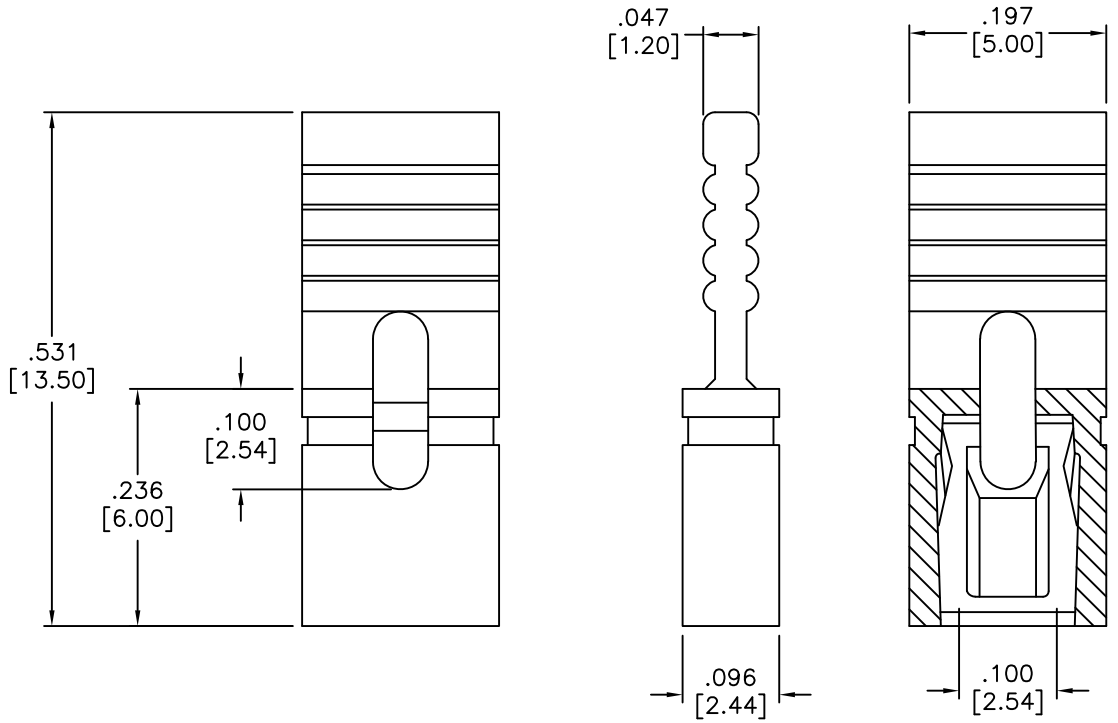

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V–0

Insulator color: Yellow

Contacts: Copper Alloy

Plating:

G = Gold flash over Nickel underplate overall

T = Tin over Copper underplate overall

Electrical:

Current rating: 3 Amp max

Contact resistance: 30 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 650 VAC for 1 minute

Temperature Rating:

Operating temperature: –55°C to +105°C

Environmental:

Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	10/18/11
CHECKED	CC	10/18/11
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .100 [2.54] MINI SHUNT, HANDLE TOP
.531 [13.50] HEIGHT, COLOR: YELLOW

SIZE	PART NO.	REV.
X	MSBH-X-Y	A

REF:	SCALE:	SHEET
S00076T	NTS	1 OF 1