

APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	03/19/19	
A		UPDATE DRAWING	11/2/20	OW/OC

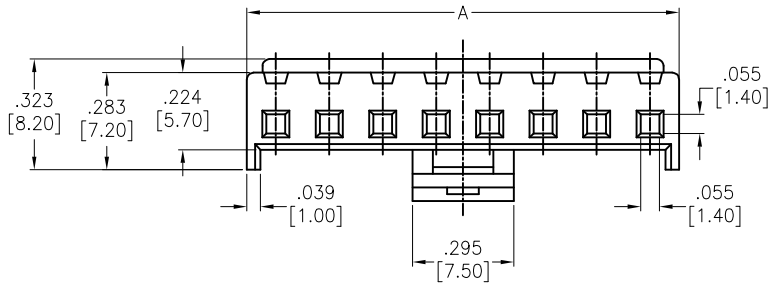






SECTION A–A



2P

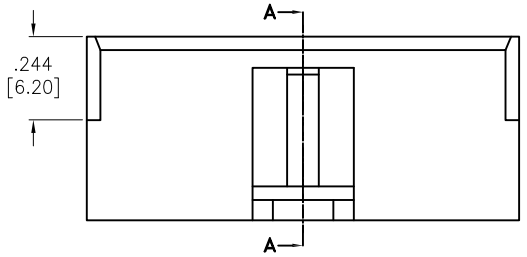



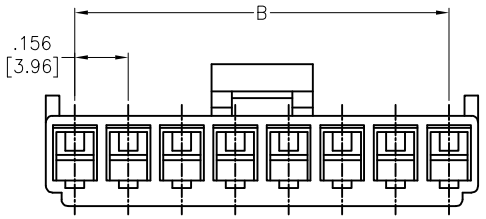

Mating Terminal: MTC–A1C–X–R

Positions: 2 thru 15

A = .156 [3.96] x No. of Spaces + .169 [4.29]

B = .156 [3.96] x No. of Spaces

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V–0

Insulator color: Nature

Electrical:

Voltage rating: 250V AC/DC

Current rating: 7A AC/DC

Contact resistance: 10 mohms max.

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,500 VAC for 1 minute

Temperature Rating:

–25°C to +85°C

Environmental:

Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	TW	03/19/19
CHECKED	LW	03/19/19
APPROVED		

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .156 [3.96] LATCHING WIRE HOUSING
INSULATOR COLOR: NATURE

SIZE	PART NO.	REV.
X	MTC-A1-XX-V0	A

REF:	SCALE:	SHEET
S00124T	NTS	1 OF 1