
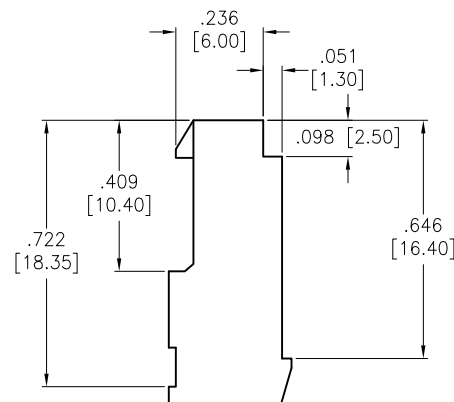
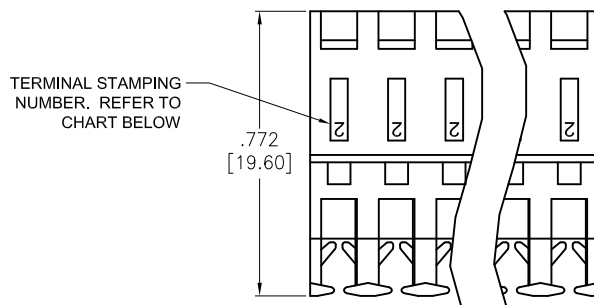


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/26/19	
A		UPDATED DRAWING	3/3/20	SS

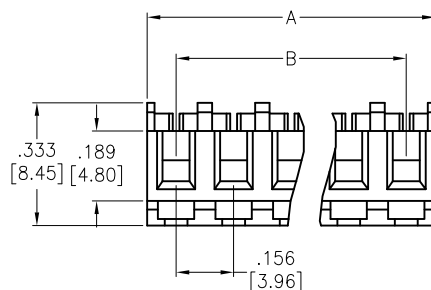

PART NUMBER	Wire Size	Terminal Marking
MTD-B2-XX-A-2	18 AWG	8
MTD-B2-XX-B-2	20 AWG	0
MTD-B2-XX-C-2	22 AWG	2
MTD-B2-XX-D-2	24 AWG	4
MTD-B2-XX-E-2	26 AWG	6

SPECIFICATIONS:

Material:
 Housing: Nylon 66, rated UL 94V-2, Color: Natural
 Terminal: Brass, Tin plated
 Electrical:
 Current rating: 7A AC, DC
 Voltage rating: 250 VAC max
 Contact resistance: Initial Value 10 mohms max
 after environmental testing 20 mohms max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 1,500 VAC for 1 minute
 Temperature Rating:
 -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant



Positions: 02 thru 25
 A = .156 [3.96] x No. of Positions
 B = .156 [3.96] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010			ADAM TECH INTERCONNECTS		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS DRAWN AY CHECKED TW APPROVED			DATE 11/26/19 11/26/19			TITLE IDC MASS TERMINATION HOUSING, .156 [3.96] SPACING, CLOSED END
SIZE X		PART NO. MTD-B2-XX-X-2		REV. A		
REF: S00075T		SCALE: NTS		SHEET 1 OF 1		