

| Rev | AWO # | Description | Date | Appr |
|---|---|---|---|---|
| - | | RELEASED | 12/8/22 | |

APPROVED: _____


DATE: _____ TITLE: _____


Dimension 1.5mm and 7.95mm
Can not be Negative Tolerance at Same Time




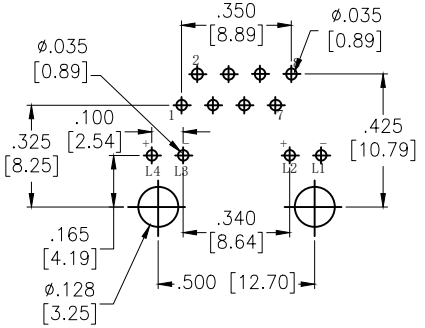





RECOMMENDED P.C.B LAYOUT







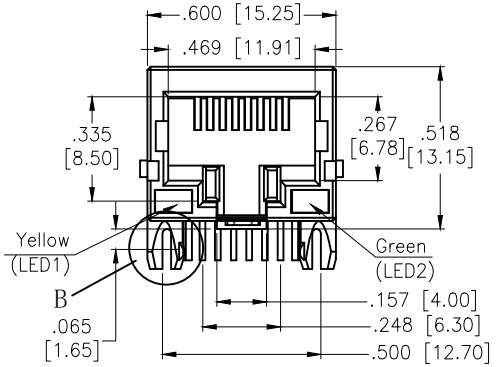

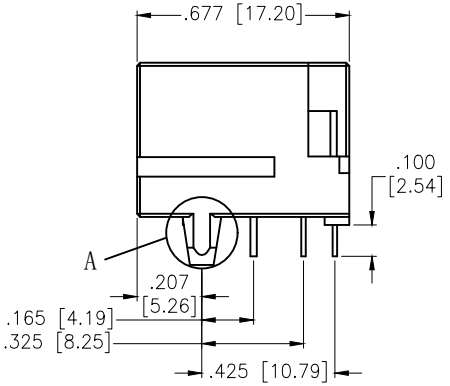VIEW B




VIEW A

SPECIFICATIONS:
Material:
Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Phopsphor Bronze
Contact Plating:
Round contact
Gold over Nickel underplate overall
Flat contact
Gold over Nickel underplate on contact area
Tin over Nickel underplate on solder tails
Electrical:
Voltage rating: 125 VAC RMS.
Current rating: 1.5 Amp.
Contact resistance: 20 Milliohms max.
Insulation Resistance: 1000M ohm Min@ 500 VDC
Dielectric Withstanding Voltage: 1,000 VAC or 1,500 VDC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +85°C
Environmental:
Lead free, RoHS compliant. RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

| INCHES | | HOLES | |
|---|---|---|---|
| .X | ± .10 | Ø.X | ±.10 |
| .XX | ± .020 | Ø.XX | ±.015 |
| .XXX | ± .015 | Ø.XXX | ±.010 |

| | | |
|---|---|---|
| DRAWN | JJ | 12/8/22 |
| CHECKED | YC | 12/8/22 |
| APPROVED | | |

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: MODULAR TELEPHONE JACK, 8P8C
RIGHT ANGLE, FULL , W/LED, HI-TEMP

| SIZE | PART NO. | REV. |
|---|---|---|
| X | MTJ-884X1-LG-HT | - |

REF: S00005C | SCALE: NTS | SHEET 1 OF 1