


ALUMINIUM SCREW COVER ENCLOSURE (BOLTED FEET)

The **5412 EALSC** (screw cover) water, oil & dust tight enclosures are used indoors or outdoors, in areas where a corrosion problem exists or where the enclosures may be subject to hosing or water coming from any direction, or for protection against dust, dirt or oil splashing.


CSA Certified / UL Listed / NEMA / EEMAC 4X / IP66

Technical specifications:



- Made of high quality aluminium with all seams continuously welded.
- Opening has a flat lip around all sides to increase rigidity and prevent dripping water from entering the enclosure when the cover is removed.
- Seamless gasket ensures a complete and durable water tight seal.
- The enclosure comes with bolted wall mounting feet.
- Enclosures comes complete with a galvanized inner panel.
- Finished with heat fused powder paint, electrostatically applied on a pretreated base.
- Paint color : Aluminum

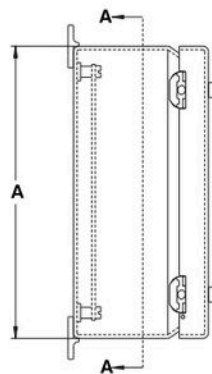

NOTE: - TWO MOUNTING FEET IF B=4" OR LESS

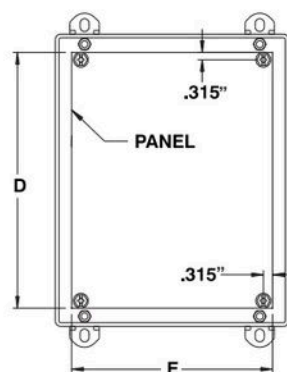

SECTION B-B

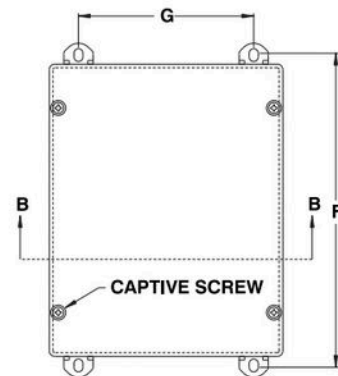

SECTION A-A

CATALOG NUMBER	DIMENSIONS							SHIP WGHT LBS.
	A	B	C	D	E	F	G	
5412 EALSC120202	12	2	2.312	Ø Pan.	Ø Pan.	12.750	----	3
5412 EALSC040403	4	4	3.312	Ø Pan.	Ø Pan.	4.750	----	2
5412 EALSC060403	6	4	3.312	4.880	2.880	6.750	----	3
5412 EALSC060404	6	4	4.312	4.880	2.880	6.750	----	4
5412 EALSC060604	6	6	4.312	4.880	4.880	6.750	4.000	5
5412 EALSC080604	8	6	4.312	6.880	4.880	8.750	4.000	6
5412 EALSC080804	8	8	4.312	6.880	6.880	8.750	6.000	8
5412 EALSC100804	10	8	4.312	8.880	6.880	10.750	6.000	9
5412 EALSC101004	10	10	4.312	8.880	8.880	10.750	8.000	10
5412 EALSC120404	12	4	4.312	10.880	2.880	12.750	----	6
5412 EALSC160404	16	4	4.312	14.880	2.880	16.750	----	6
5412 EALSC121005	12	10	5.312	10.880	8.880	12.750	8.000	13
5412 EALSC080606	8	6	6.312	8.880	4.880	8.750	4.000	7
5412 EALSC100806	10	8	6.312	8.880	6.880	10.750	6.000	10
5412 EALSC101006	10	10	6.312	8.880	8.880	10.750	8.000	11
5412 EALSC120606	12	6	6.312	10.880	4.880	12.750	4.000	9
5412 EALSC121206	12	12	6.312	10.880	10.880	12.750	10.000	15
5412 EALSC141206	14	12	6.312	12.880	10.880	14.750	10.000	19
5412 EALSC160606	16	6	6.312	14.880	4.880	16.750	4.000	11
5412 EALSC161406	16	14	6.312	14.880	12.880	16.750	12.000	23
5412 EALSC141208	14	12	8.312	12.880	10.880	14.750	10.000	20
5412 EALSC161410	16	14	10.312	14.880	12.880	16.750	12.000	25

